


Weatherstrip

SELECTION GUIDE


It is important to have the right weathersealing around your door panel to ensure a proper seal in your entryway and protection from the elements. This resource will help you select the appropriate weatherstrip for your door from the range of weatherstrip options available on BetterDoor.com.

NOTE: All weatherstrip options offered at BetterDoor.com are designed to fit into a kerf slotted door jamb. If your door does NOT have a kerf slot, as shown below, NONE of the weatherstrip options will work with your door.

Standard Weatherstrip

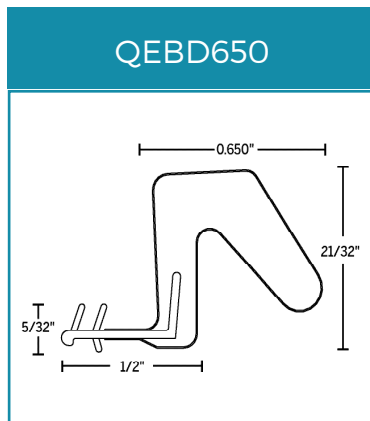


Reach: 0.650" (21/32")

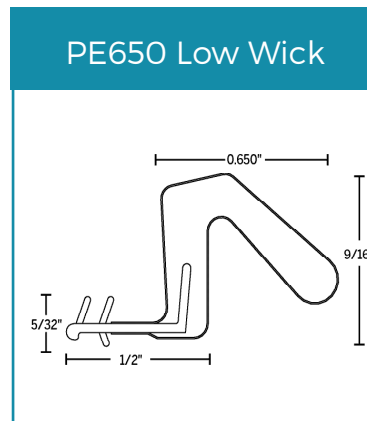


Reach: 0.650" (21/32")

Extended Weatherstrip

Not intended for hinge side of frame

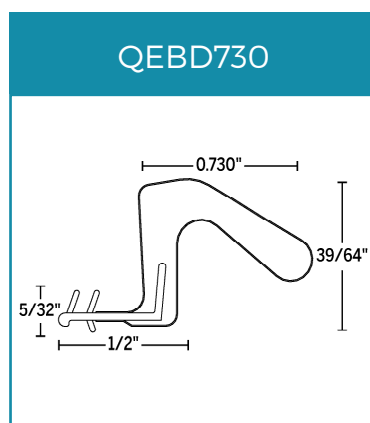

Reach: 0.730" (23/32")

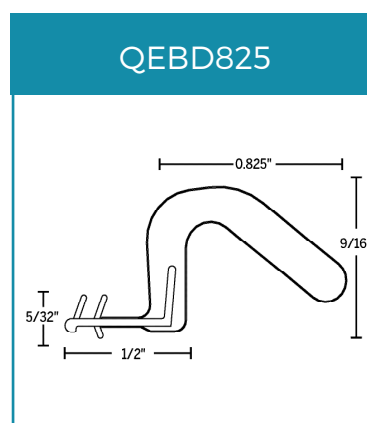


Reach: 0.825" (13/16")

Weatherstrip

SELECTION GUIDE


Weatherstrip Product Reference Guide

Side View of Weatherstrip

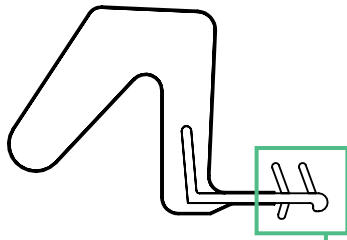


Kerf

The kerf is inserted into a slot in the header and jambs, or mullions, to secure the weatherstrip.

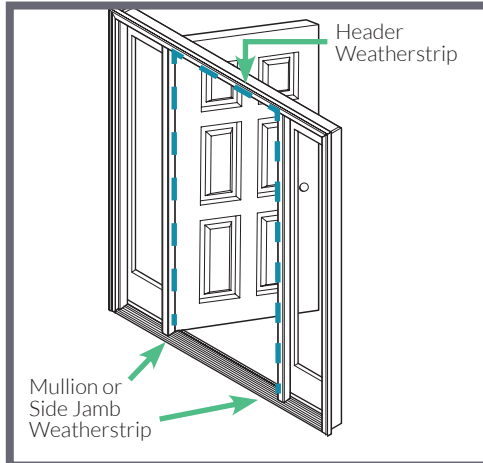


Top Down View of Side Jamb



Weatherstrip Selection

Top View of Door

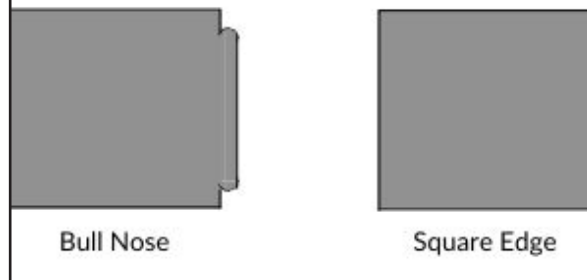

1. Before purchasing, take a look at your door. For bull nose specifications use extended weatherstripping. For square edge specifications use standard weatherstripping.
2. If your margins are wide or your door is not plumb/square we recommend you use our extended reach weatherstrip.